

Adding Second Joystick



- The simple process of adding second joystick to the Curotto controls starts by ordering the kit using P# AC8-0007-DC-KT
- This second joystick can be helpful in rural applications where operating the vehicle from the street side is required



Curotto Joystick in street side application

Considerations prior to installation

- Location of joystick
 - FL control configuration – NOT recommended with single, dual axis joystick. Twin stick (“rabbit ear”) controls or autodump controls ARE recommended.
 - Ensure any operator is trained to run the system with from the desired position prior to putting into service


Kit Description



- P# AC8-0007-DC-KT

AC8-A311-DC-PT
Pigtail
Splitter

AC8-0007-K
Joystick with
Harness

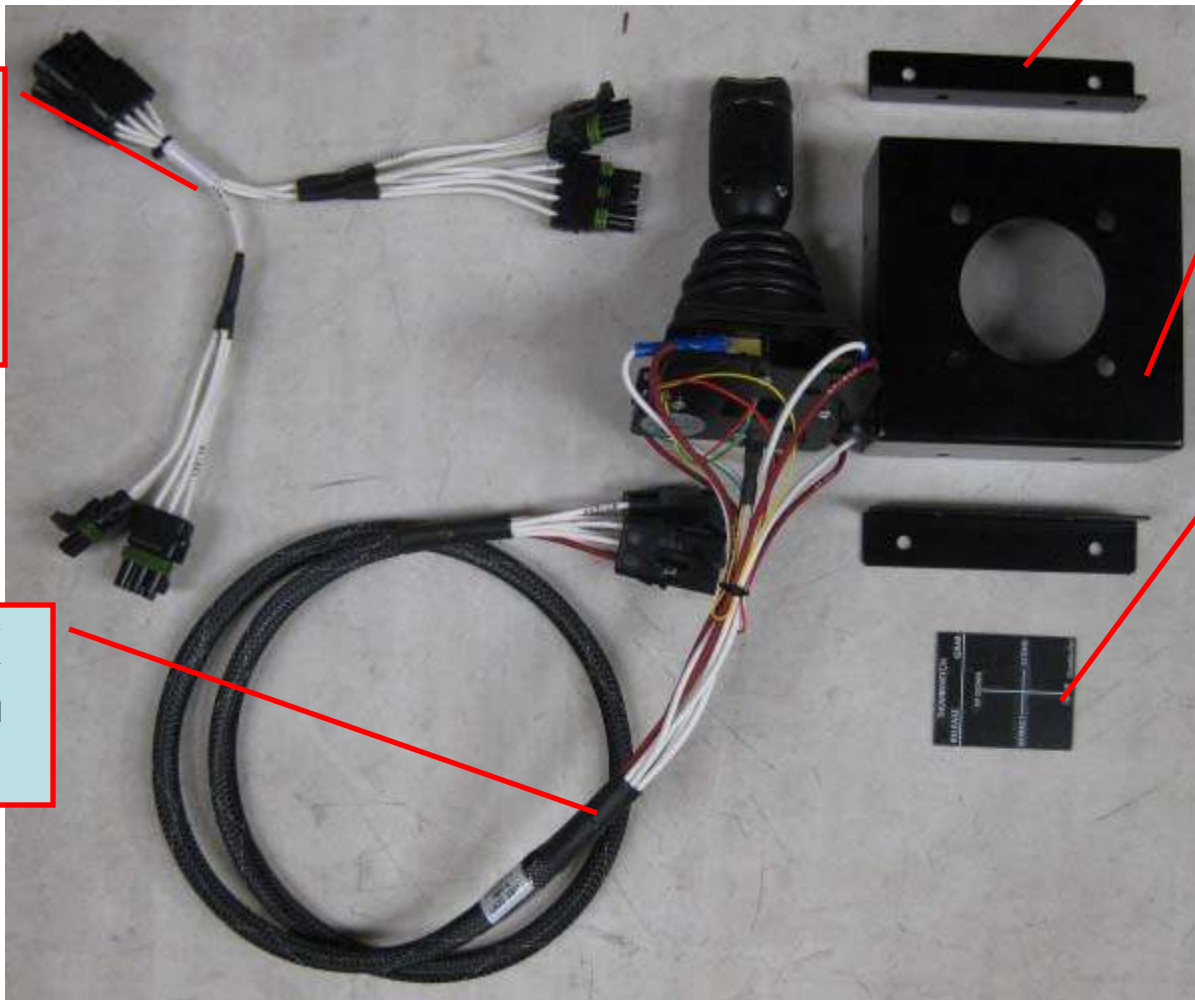


FL-UJBM
Universal
Bracket
Joystick Mount
qty (2)

FL-UJB
Universal
Joystick
Bracket

Panel-164
Joystick
Instruction
Panel


Adding Second Joystick - Step 1

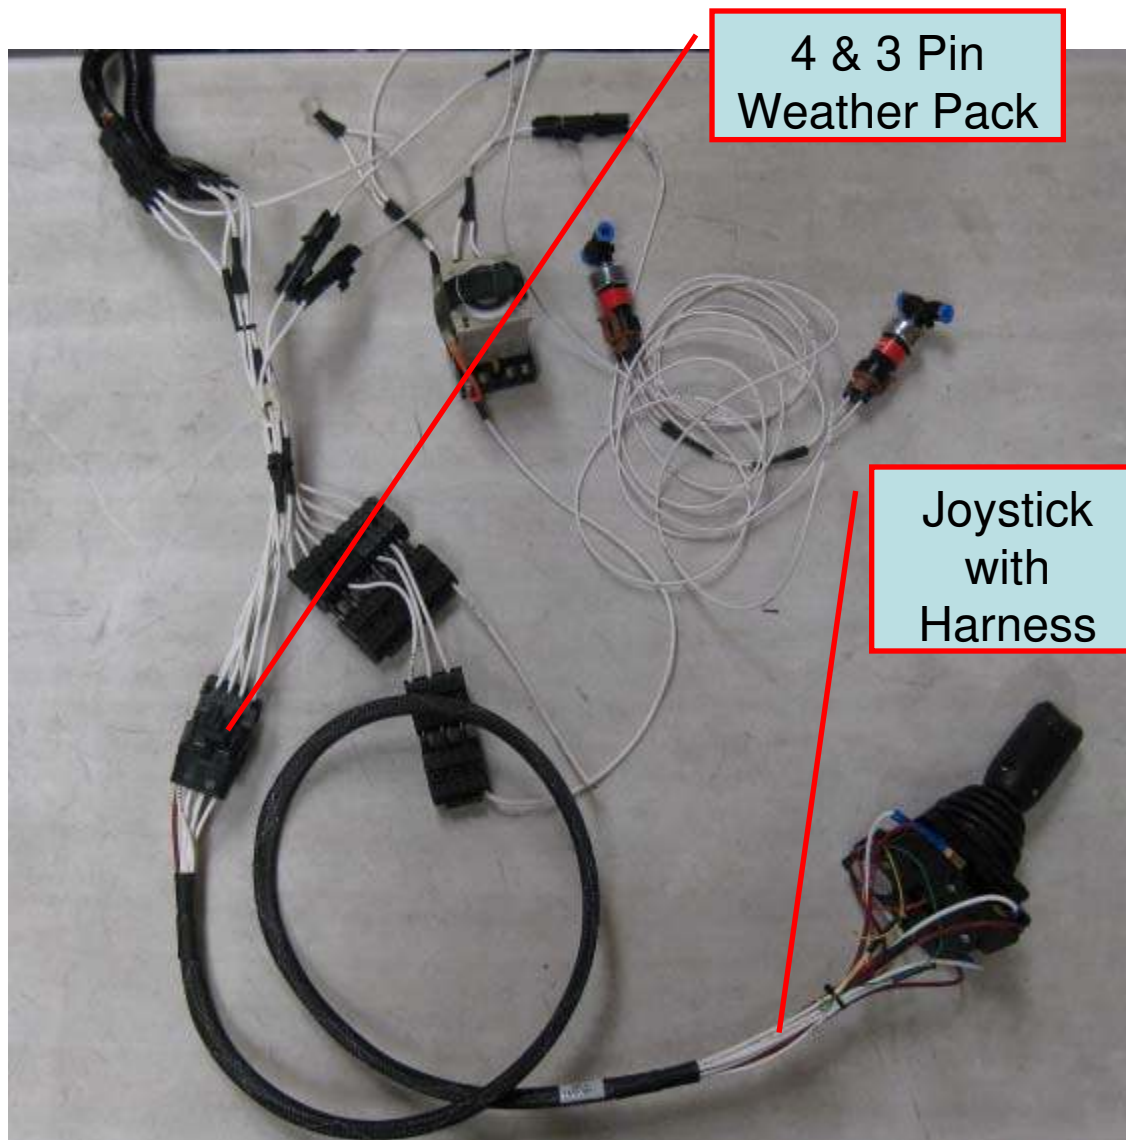

- Locate Joystick with Harness P# AC8-0007-K in cab's curbside operator position
- Follow harness to the 4 + 3 pin weather pack connectors


Adding Second Joystick - Step 2

Pigtail Splitter

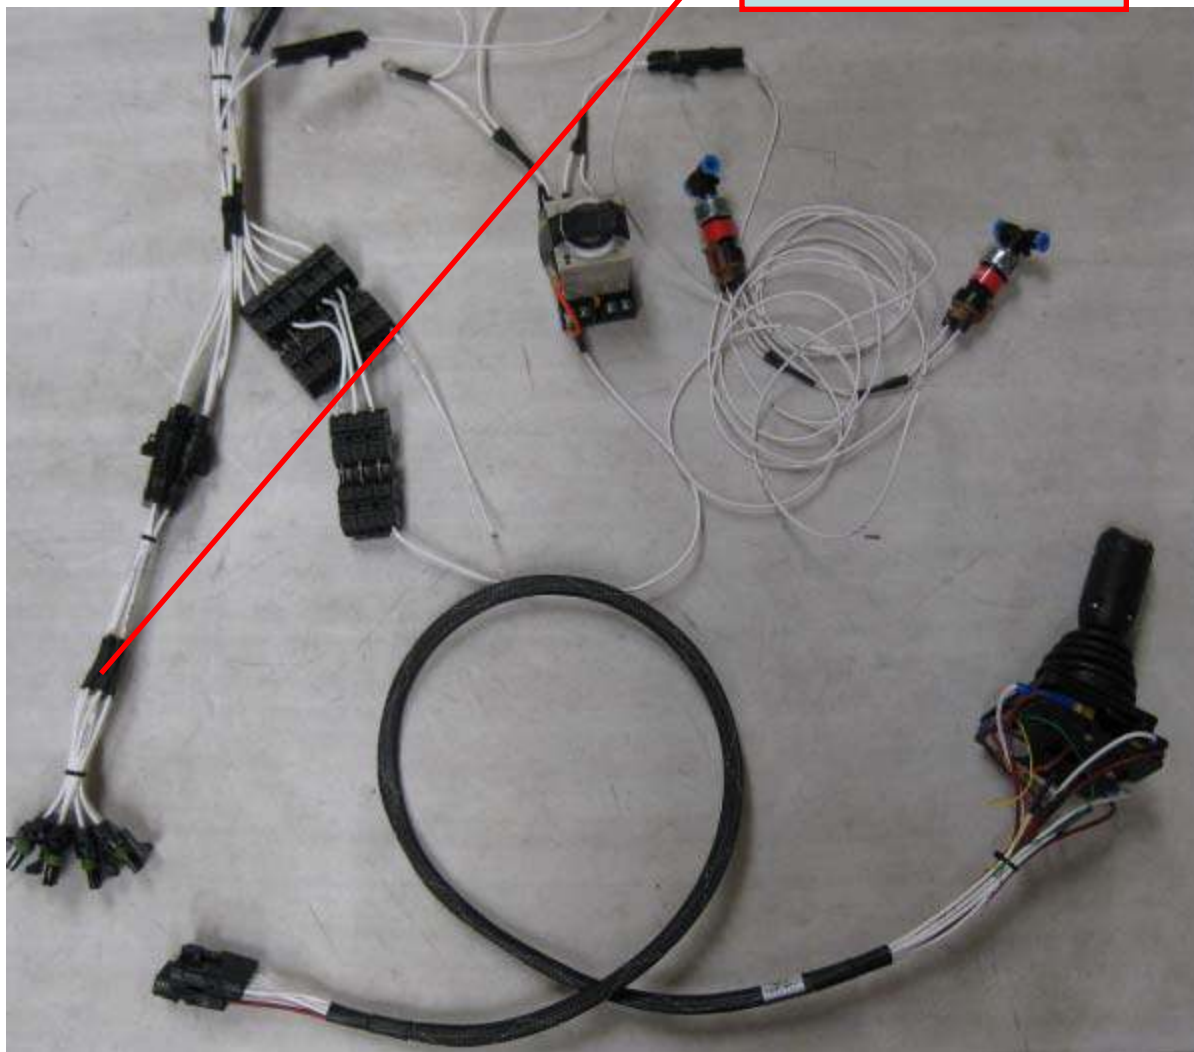


- Disconnect Joystick with Harness P# AC8-0007-K
- Install the pigtail splitter PN AC8-A311-DC-PT

Adding Second Joystick – Step 3

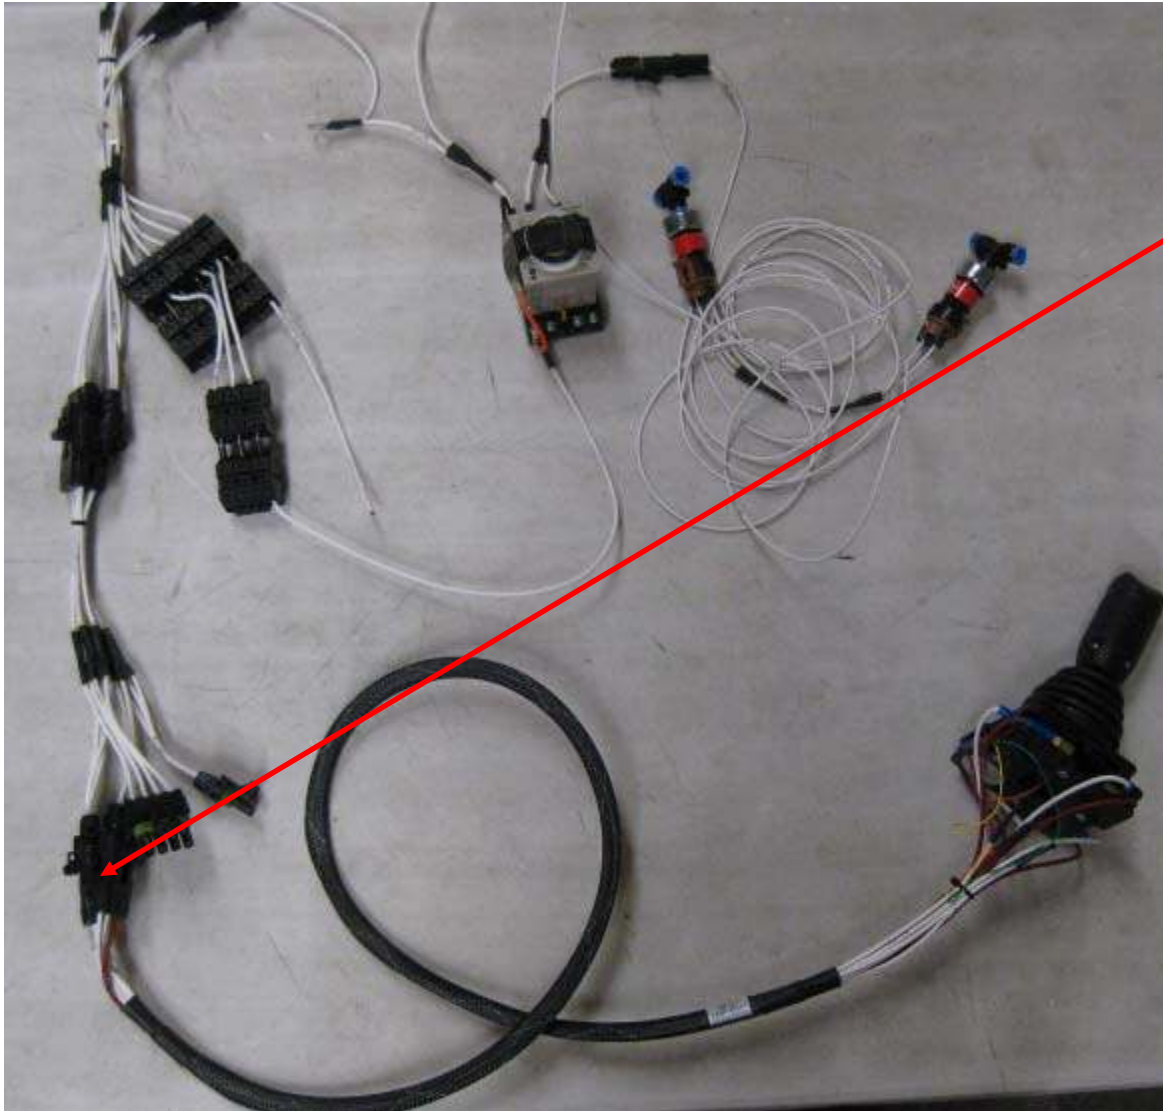

- Reconnect original Joystick with Harness P# AC8-0007-K into Pigtail Splitter P# AC8-A311-DC-PT

Adding Second Joystick – Step 4

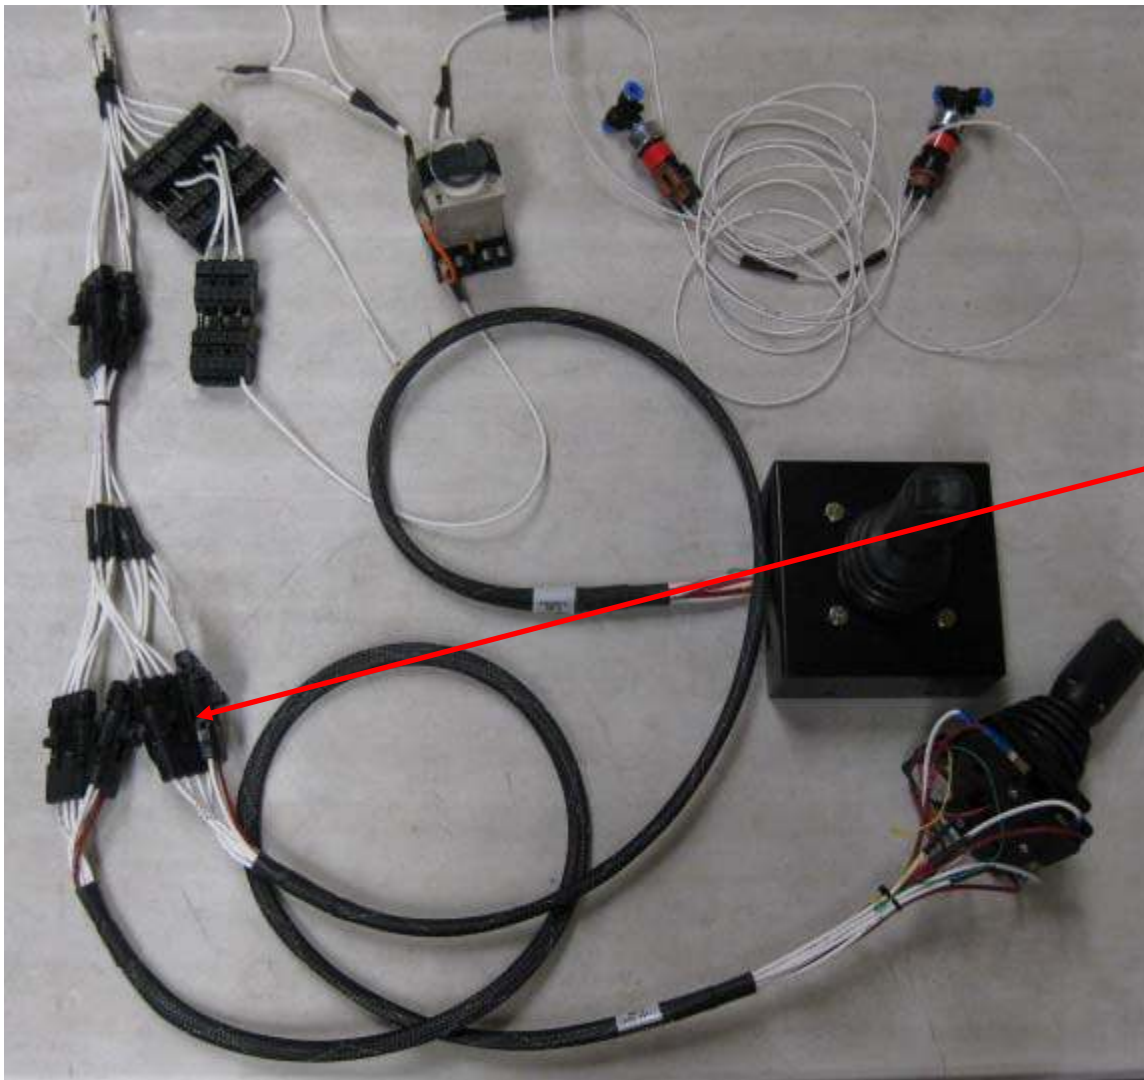

- Determine routing and mounting of new joystick and harness on street side of cab
- Route and connect new Joystick with Harness into splitter P# AC8-A311-DC-PT

Adding Second Joystick – Step 5



Joystick Orientation



- When fitting the joystick ensure that the Curotto “Genuine Parts” decal on underside of joystick is oriented forward/left in the mounted position (toward the windshield)
- This ensures correct operation of the installed joystick