



Unbeatable Versatility. Lowest Total Cost of Collection.

The **Curotto-Can** Automated Carry Can has the fastest load time of any automated system on the market and delivers a proven 25% to 30% productivity advantage over automated side loaders. By using the robust reliability and additional capacity of a front loader, this carry can delivers game-changing performance that will enable you to service more customers, more quickly, in more applications.

Key Features

- + Fastest load time available — 4 to 5 seconds from wheel stop to wheel go.
- + 20% greater fuel efficiency due to less packing and idling.
- + Navigate cul-de-sacs up to 25% faster.
- + Eliminate cart loss and associated costs.
- + Eyes-forward operation enhances operator and public safety as well as reduces the risk of repetitive stress injuries.
- + Hopper is 4x larger than an ASL (capable of taking large bulk).
- + Having a uniformed front load fleet, requires fewer back up trucks and helps standardize your inventory.
- + Reduce contamination rates to less than 5%.
- + Low 108" cart dump height for safe operation — well below typical wires, trees and other overhead obstructions.
- + Load bulk material with easier access to container waste and eliminate the need for a chase truck.
- + Convert any commercial front loader to a residential collection unit in minutes.
- + Better operator experience due to less cab shake and no strained necks from craning to monitor ASL arm functions.
- + Less down time. If maintenance is needed, simply swap out the can or remove it for commercial collection. The truck is back making money in no time.

Learn more about the many advantages of The Curotto-Can[®]



Increased Safety



Maintenance Costs



Cost Of Spares



Operating Costs



Increased Productivity



Route Flexibility




Additional Benefits




WCIS Costs

Curotto-Can[®] Automated Carry Can

With the versatile **Curotto-Can**, one truck can replace an automated side loader, recycling unit, or a rear loader equipped with cart tipplers to cost effectively reduce the number of vehicles in your fleet.

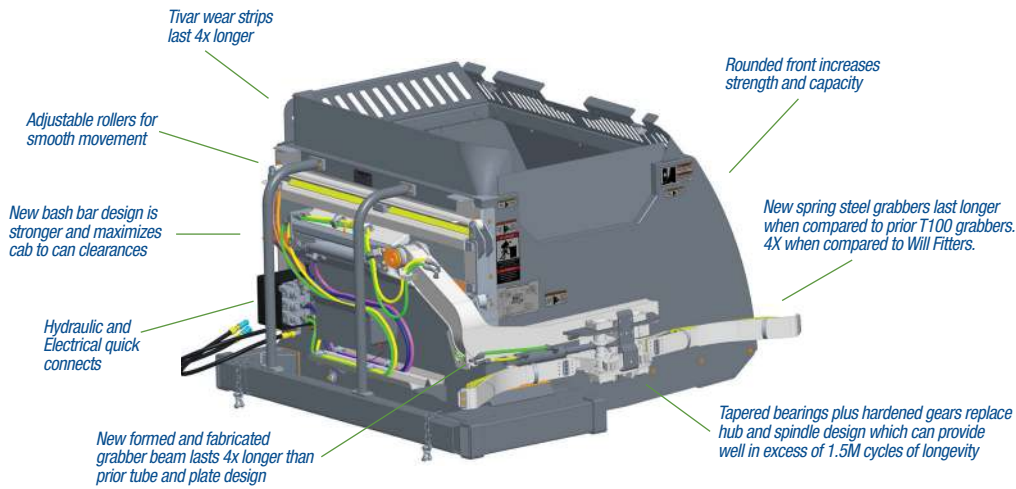

Engineered for maximum efficiency and reliability.

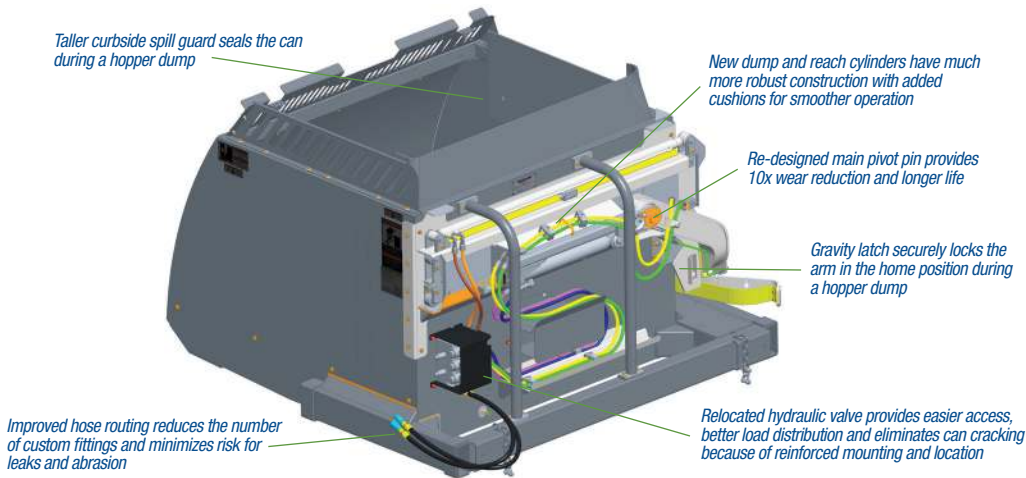

To learn how to make your route more productive and significantly reduce your Total Cost of Collection, call the **Curotto-Can** experts today at: **1-866-696-4345**

Your Authorized Curotto-Can[®] Dealer:

Technical Specifications

Dimensions	
Overall Size	55"H x 64"W x 81.75"L
Inside Height	45.88"
Lifting Pocket	6"H x 3"W x 0.25" thick high-strength steel
Weight	1870 lbs.

Capacity	
Carts	32 to 96 gal.
Lift Capacity	500 lbs.
Volume	4.6 cu. yd.

Cycle Times @ 14 gpm	
Full Slide Extend	2.5 seconds
Full Slide Retract	1.5 seconds
Dump	2.0 seconds
Dump Return	1.2 seconds

Control System	
Externally mounted curbside and/or street-side joystick-type cab; optional curbside-accessible switch bank mounts to cab interior	

Hydraulic System	
Pressure	2000 psi

Cylinders	
Slide	
Bore	1.5"
Stroke	54"
Shaft Diameter	1"
Dump	
Bore	2.5"
Stroke	14"
Shaft Diameter	1.5"
Grab Cylinder	
Bore	1.5"
Stroke	7"
Shaft Diameter	1"
Induction-hardened, ground and polished chrome rods	

The Curotto-Can[®]
The Future of Automated Collection
A **DOVER** COMPANY

To learn more, visit us online: www.thecurottocan.com    

The Curotto-Can[®]

2030 Hamilton Place Blvd., Suite 200, Chattanooga, TN 37421
P: 707.939.2802 | F: 413.521.6644 | E: info@thecurottocan.com